


# Stationary Cold Water Pressure Washers

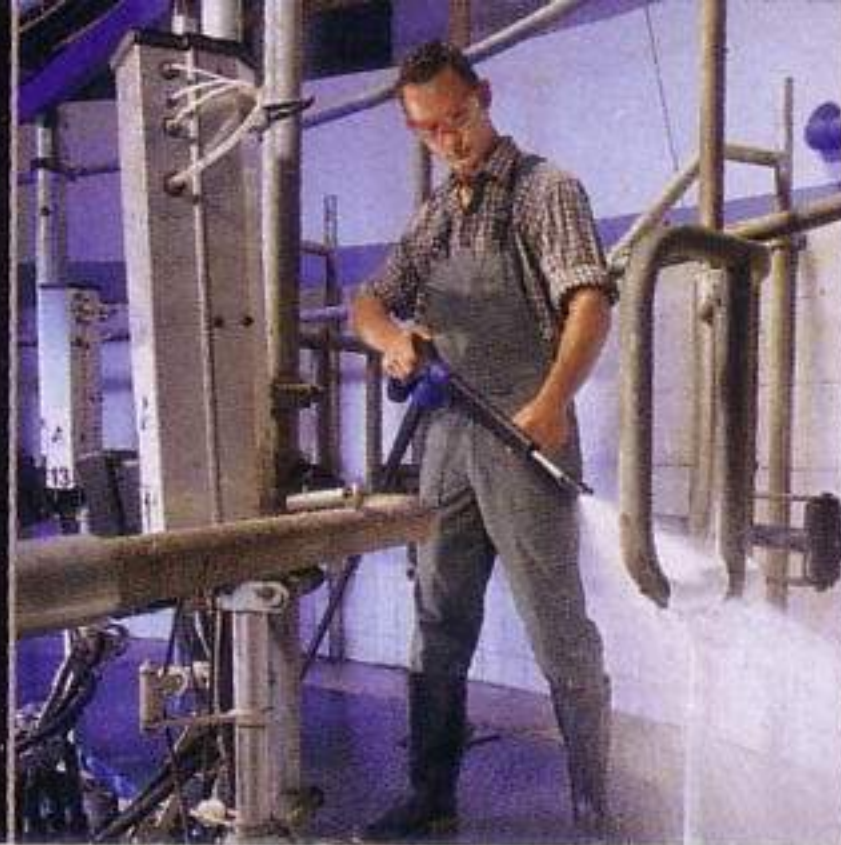

**Nilfisk ALTO**  
Why Compromise

Accessories from page 26


Detergents from page 110

**Wap KEW**  
TECHNOLOGIES




## ◀ DELTA BOOSTER

The Nilfisk-ALTO DELTA BOOSTER is a unique cleaning system designed for use in all industrial environments, in food industry and in shipping. The DELTA BOOSTER will support as many as 6 operators simultaneously, and was developed to fully meet the heaviest and most varied cleaning demands. Built with hygiene in mind and with a host of features, the DELTA BOOSTER offers the flexibility of customised control as well as selectable water volume and pressure.

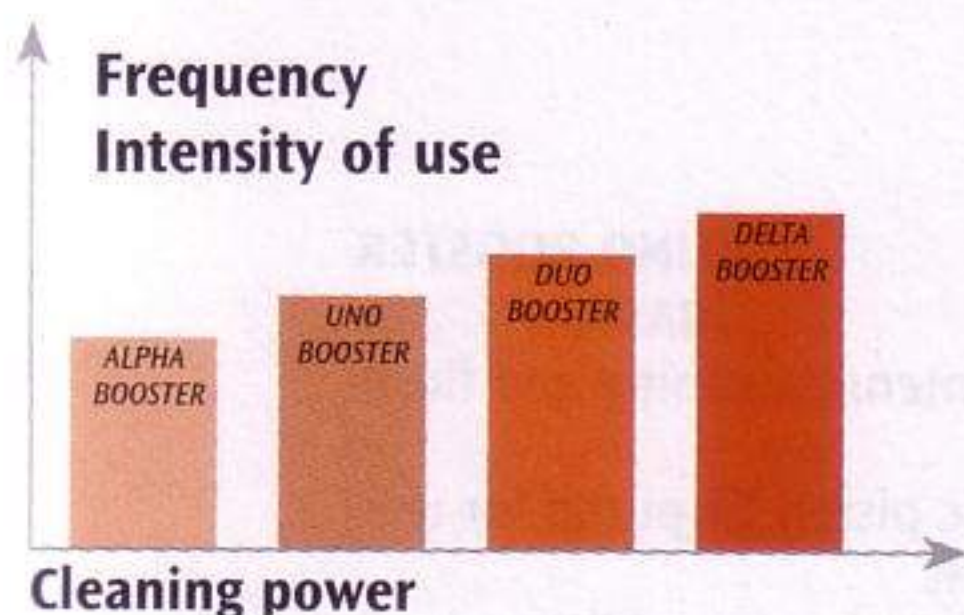

### DELTA BOOSTER

- As many as 6 simultaneous users per machine, and machines can be 'linked' for more users
- Intelligent control system: detects flow requirements, starts up correct number of pumps in relation to these requirements, and rotates pump usage. Detects and indicates faults
- Heavy duty C3 pump for intense use, long lifetime and high inlet temperature use
- High level of serviceability: easy access, possibility to remove defective pumps and continue working with remaining units
- Stainless steel design for extra hygiene and durability
- Possibility to work with pre-heated water to increase cleaning effect

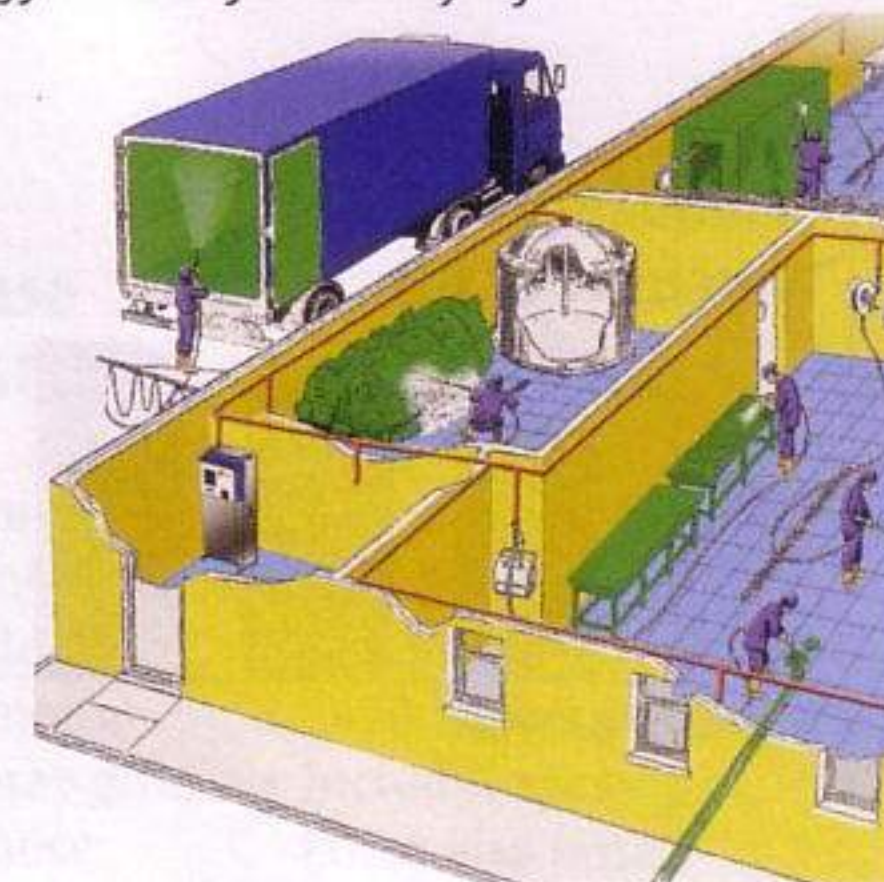

### Technical Data:

Pump:		2 pumps	3 pumps	4 pumps	5 pumps	6 pumps
Pressure	bar/MPa	160/16	160/16	160/16	160/16	160/16
Cleaning impact	kg/Force	Variable	Variable	Variable	Variable	Variable
Water flow, Q <sub>IEC</sub>	l/h	1040-2080	1040-3120	1040-4160	1040-5200	1040-6240
Water flow, Q <sub>max</sub>	l/h	2080	3120	4160	5200	6240
Max. inlet temp.	°C	80	80	80	80	80

### Motor:

Total motor input power	kW	13.70	20.10	27.00	33.75	40.50
	V/~ /Hz/A	400/3/50/23.5	400/3/50/6+36	230/1/50/15.7	230/1/50/13	400/3/50/69.5
		230/3/50/42	230/3/50/62	230/3/50/83	230/3/50/104	230/3/50/125
		440/3/60/21.5	440/3/60/32	440/3/60/43	440/3/60/53	440/3/60/64.5
		415/3/60/21.5	415/3/60/32	415/3/60/43	415/3/60/53	415/3/60/64.5
				400/3/50/47.5	400/3/50/58	
Pump	RPM	1450	1450	1450	1450	1450

### Standard Features:

Weight	kg	250	300	350	400	450
Dimensions L x W x H	mm	715 x 790 x 1800	715 x 790 x 1800	715 x 790 x 1800	715 x 790 x 1800	715 x 790 x 1800

### Standard Accessories:

Water inlet coupling type	Quick 3/4"	Quick 3/4"	Quick 3/4"	Quick 3/4"	Quick 3/4"
High pressure couplings	Quick 3/4"	Quick 3/4"	Quick 3/4"	Quick 3/4"	Quick 3/4"
Automatic Start/Stop	●	●	●	●	●
Water break tank	●	●	●	●	●
Diagnostic system	●	●	●	●	●