

Airless Applicators

Accessories

Extended Reach Tools & Accessories

POLE GUNS

244057 3 ft. (0.9 m)

244058 6 ft. (1.8 m)

Maximum working pressure: 3600 psi (24.8 MPa, 248 bar).
Features the new CleanShot™ Shut-Off Valve and Contractor In-Line Valve (see below).
Unmatched spraying performance in high or recessed areas.
Well-balanced and lightweight design.
Includes 517 RAC 5 SwitchTip and HandTite Guard.

244160 CleanShot Shut-Off Valve

Maximum working pressure: 3600 psi (24.8 MPa, 248 bar).
Shuts fluid flow off at the tip.
180° tip swivel for ultimate spraying versatility.
Pressure-actuated – operates at a minimum of 700 psi (4.8 MPa, 48 bar).
Can override valve (open) for cleaning, priming or low-pressure applications.
Shut-Off Valve Repair Kit - 244162
CleanShot Swivel Repair Kit - 244363
Includes 517 RAC 5 SwitchTip and HandTite Guard.

244161 Contractor In-Line Valve

In-handle Paint Filter and built-in Hose Swivel connection for top spraying performance.
Can be used with other extended reach tools.
In-Line Valve Repair Kit - 218070
Uses Contractor Gun Filters 218131 (50 mesh) and 218133 (100 mesh).
Maximum working pressure: 3600 psi (24.8 MPa, 248 bar).

POLE GUN EXTENSIONS


244163 1 ft. (0.3 m)

244164 2 ft. (0.6 m)

Maximum working pressure: 3600 psi (24.8 MPa, 248 bar)
Use with the Contractor In-Line Valve and the CleanShot Shut-Off Valve to create different length Pole Guns.
Lightweight aluminum construction.
Unique fitting and captive gasket allow quick attachment to Airless Gun or In-Line Valve.
Can be used alone or connected in series for longer reach.
Outside Diameter: 5/8 in (15.9 mm).
Standard with 7/8 in (22 mm) gun nut.
Fits Graco or Titan Guns.



Pole Gun
244057

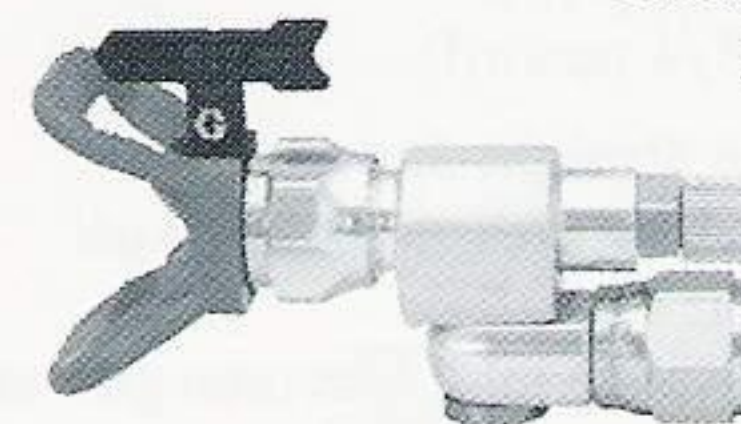

CleanShot Valve
244160



In-Line Valve
244161