



Airless Applicators Accessories

Gun Filters, Swivels and Adapters

- 210500 In-line Gun Filter**
Maximum working pressure - 5000 psi (34.5 MPa, 345 bar).
Filters fluid before it enters the gun.
Helps reduce tip plugging; provides better finish quality.
Attaches to hose and connects to the gun inlet.
Contains one 205264 filter equivalent to 100 mesh (149 micron) screen.
Fluid Inlet - 1/4 npsm(m).
Fluid Outlet - 1/4 npsm(f).


- 239394 High Pressure SST Swivel/Filter**
Maximum working pressure: 5800 psi (40.1 MPa, 401 bar).
Fluid inlet - 1/4 npsm(m)
Fluid outlet - 1/4 npsm(f)

- 224457 High Pressure Straight Swivel**
Maximum working pressure - 3600 psi (24.8 MPa, 248 bar).
Provides a swiveling joint between gun and hose for free gun movement.
Installs at gun inlet.
Leather packings.
Fluid inlet - 1/4 npt(m).
Fluid outlet - 1/4 npsm(f).

- 189018 High Pressure Straight Swivel**
Maximum working pressure - 5800 psi (40.0 MPa, 400 bar).
Provides a swiveling joint between gun and hose for free gun movement.
Installs at gun inlet.
Fluid inlet - 1/4 npsm(m).
Fluid outlet - 1/4 npsm(f).

- 236987 High Pressure Straight Swivel**
Maximum working pressure - 7400 psi (51.0 MPa, 510 bar).
Provides a swiveling joint between gun and hose for free gun movement.
Installs at gun inlet.
Teflon packings.
Fluid inlet - 1/4 npt(m)
Fluid outlet - 1/4 npsm(f)

- 181085 Gun Adapter**
Use to install a RAC IV on a competitive airless spray gun.
166969 tip gasket required.
Converts 11/16 in. (17 mm) gun thread (Wagner, ASM or Airlessco) to accept 7/8 in. (22 mm) thread used on most Graco accessories (including tip guards and extensions).

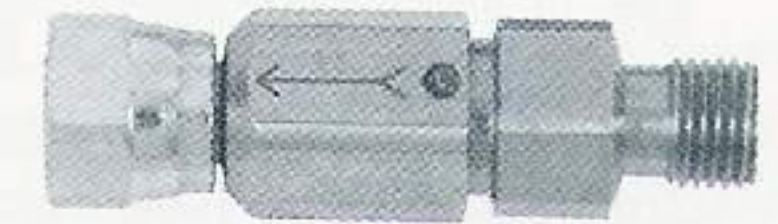

210500



224457



189018



236987



181085