

# Hand-Operated Grease Pumps


**880-675 (SK-55) STANDARD HAND-OPERATED GREASE BUCKET PUMP**

**880-676 (SK-77) STANDARD HAND-OPERATED GREASE BUCKET PUMP WITH TROLLEY**

YAMADA SK-55 and SK-77 delivers 3,2 gram (NLGI# 0/20 °C) per stroke to lubricate automobiles, industrial machines, agriculture equipment and others.

It includes: - 16 kgs. cap. bucket  
- 2 mtr. hose with grease dispense valve and a trolley (only for SK-77)

PART NO.	DESCRIPTION
851-111	Pump assy
800-601	Grease dispense valve
695-046	High pressure hose, 1/4" x 2 mtr.
851-003	Trolley

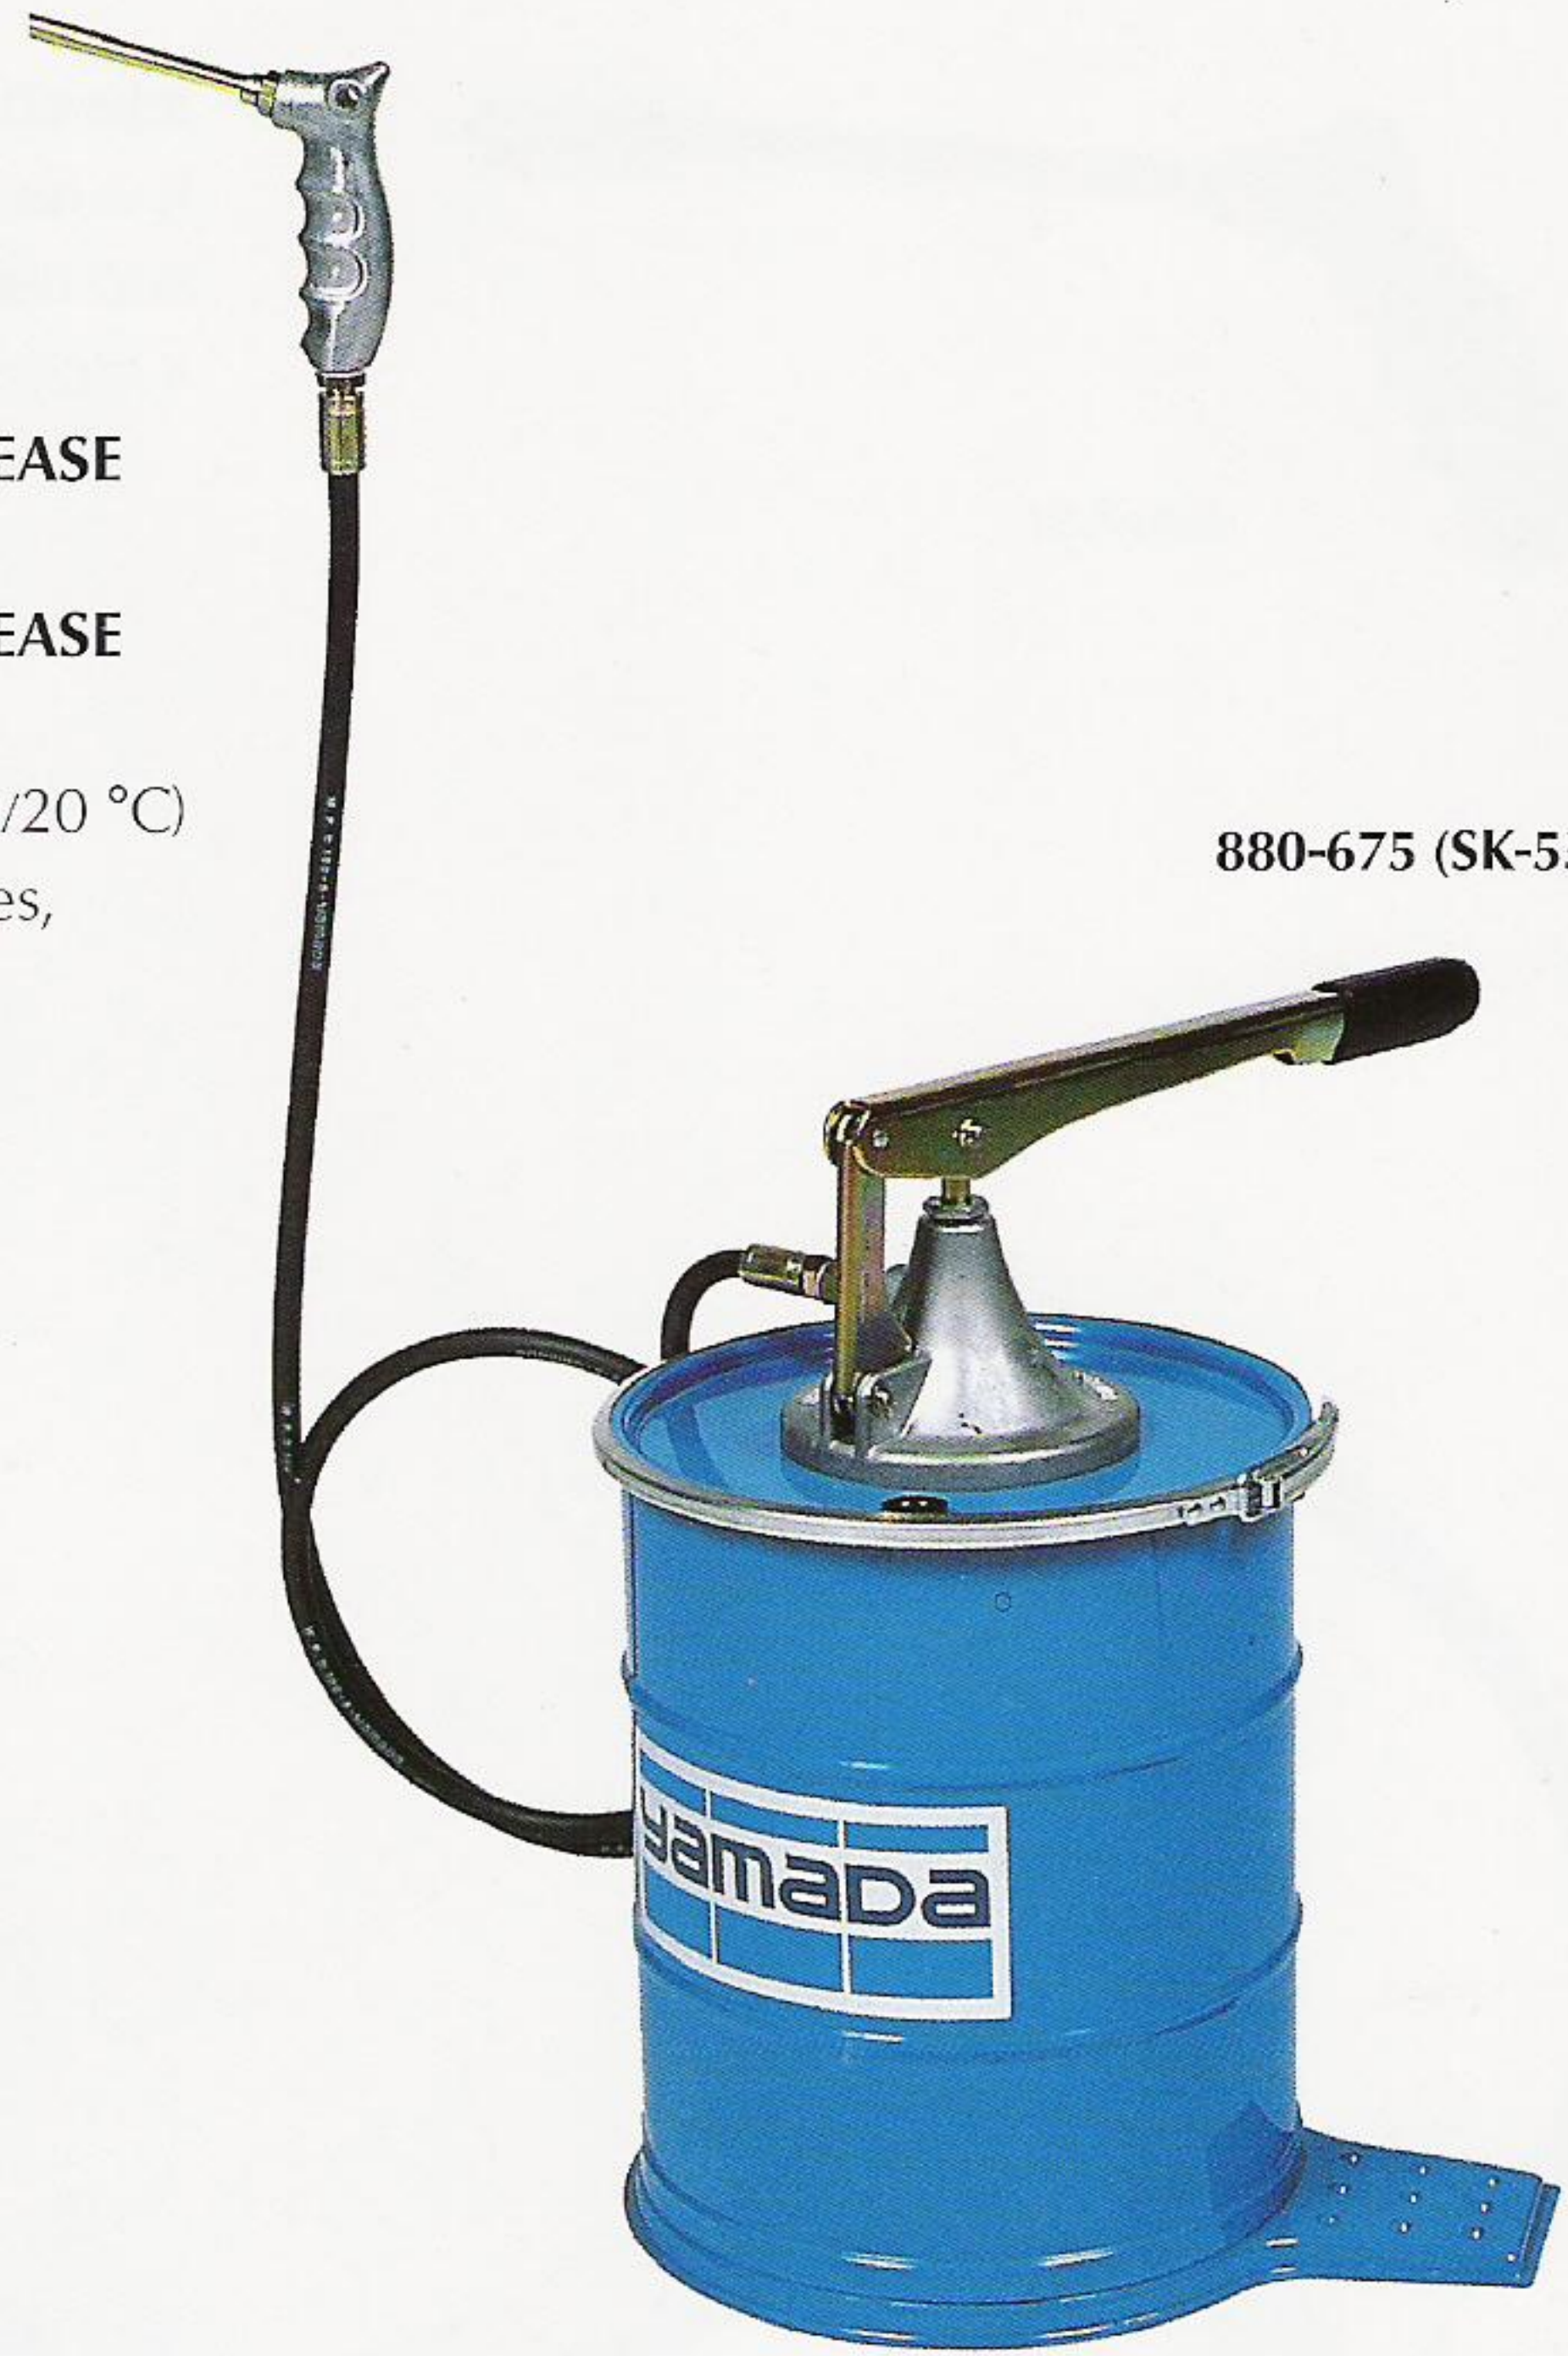

880-675 (SK-55)



851-003 (S-20)

**851-003 (S-20) TROLLEY**

It is used for SK and STB buckets pumps (880-671 and 880-676)

