

Needle scalers

Straight- and pistol models



Type	Brand	Bore diam. mm	stroke mm	Blows p/min	Vibration-level m/sec ²	Air consumption l/sec	Weight kg	Inlet thread	Hose diam. mm
YK-2*	YOKOTA	24.0	33.0	8.000	5.6	6.0	2.5	PT 3/8"	13
F-25N	YOKOTA	25.0	22.0	4.000	10.0	6.0	2.3	PT 1/4"	10
RR-0315 NS	RRA	25.0	32.0	4.000	9.4	3.0	2.6	PT 1/4"	10
RR-2110 NS	RRA	23.5	33.0	3.000	20.0	3.0	2.5	PT 1/4"	10
RRI-4006	RRI	23.5	34.0	3.000	17.0	2.6	2.6	PT 1/4"	10
RRI-4007 VR**	RRI	30.5	30.5	2.500	3.1	3.3	4.3	PT 1/4"	10
RRI-4007	RRI	30.5	30.5	2.500	12.0	3.3	4.3	PT 1/4"	10
RRI-4008	RRI	33.0	35.5	2.100	13.0	4.8	5.9	PT 1/4"	13

* = scaler / scabblers

** = vibration reduced

Type F-25N and RR-0315 NS are straight models. The other needle scalers are pistol models.




All needle scalers are supplied as standard with 3 mm needles.

Needles for type	Number 2 mm	Number 3 mm	Number 4 mm
F-25N	-	19	-
RR-0315 NS	-	19	-
RR-2110 NS	-	19	-
RRI-4006	51	19	-
RRI-4007 VR	65	28	19
RRI-4007	65	28	19
RRI-4008	-	49	35

Needle scalers

Dimensions

Type	A	B
YK-2	489	126
F-25N	412	43
RR-0315 NS	415	45
RR-2110 NS	340	175
RRI-4006	330	48
RRI-4007 VR	330	48
RRI-4007	460	57
RRI-4008	475	66

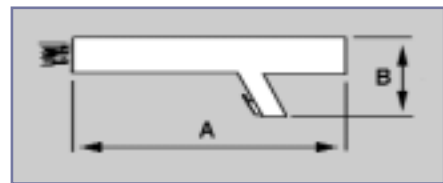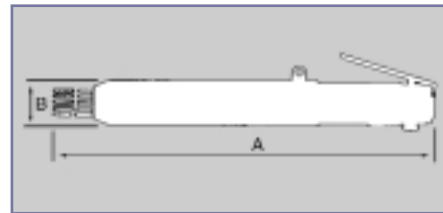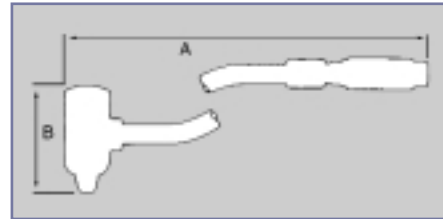

Needles

RRI-4006	6203-0827-02-01	2 mm	Blunt, hardened steel
RRI-4007 (VR)			
For all needle	6203-0827-03-01	*	3 mm Blunt, hardened steel
scalers	6203-0827-03-02		3 mm Chisel point, hardened steel
F-25N	6203-0827-03-03	3 mm	Copper-Beryllium
RR-0315 NS			
RRI-4007 (VR)	6203-0827-04-01	4 mm	Blunt, hardened steel
RRI-4008			
RRI-4007 (VR)	6203-0827-04-02	4 mm	Chisel point, hardened steel
RRI-4008			

* = supplied as standard.



YK-2