

Stationary Cold Water Pressure Washers




◀ DUO BOOSTER



▲ UNO BOOSTER

Nilfisk-ALTO DUO/UNO BOOSTER: Stationary 1 and 2 pump cold water pressure washer for mid- and heavy-duty use in food industry, heavy industry and agriculture. Basic units or extended versions with possibility of customisation, using factory-mounted options.

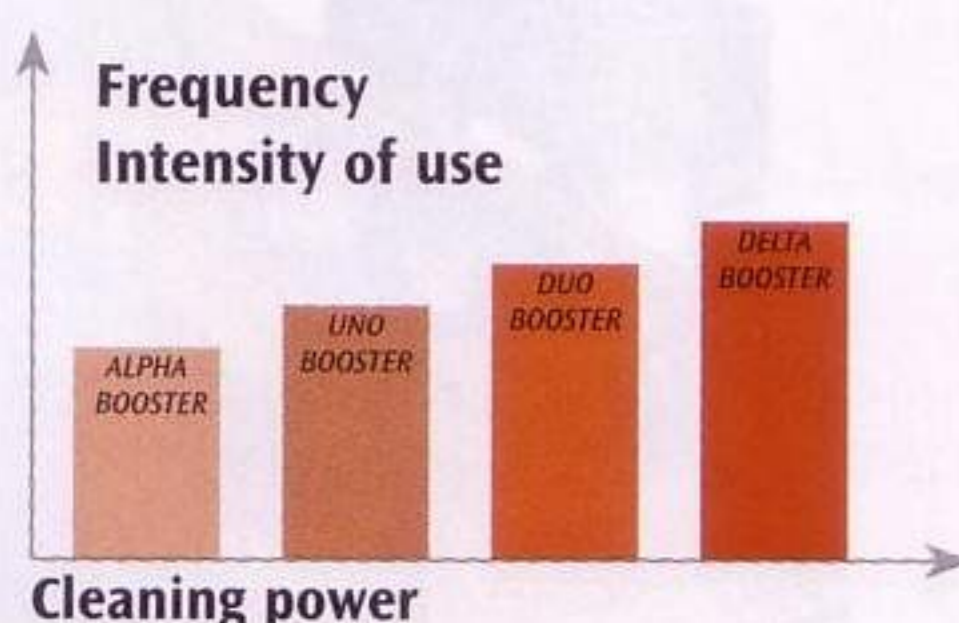

Three-phase

DUO BOOSTER EXTENDED

- 2 pump system for 1 or 2 users
- High water flow for intense cleaning and flushing applications
- Heavy-duty, 4 ceramic piston C3 pump for use in intense applications
- Robust stainless steel design for additional hygiene and durability
- Extended electronics for factory mounted options (EXTENDED-version)

DUO BOOSTER BASIC

UNO BOOSTER EXTENDED

- High water flow for intense cleaning and flushing applications
- Heavy-duty, 4 ceramic piston C3 pump for use in intense applications
- Robust stainless steel design for additional hygiene and durability
- Extended electronics for factory mounted options (EXTENDED-version)

UNO BOOSTER BASIC

Technical Data:

		DUO BOOSTER EXTENDED	DUO BOOSTER BASIC	UNO BOOSTER EXTENDED	UNO BOOSTER BASIC	
Pump:						
Pressure	bar/MPa	160/16	160/16	160/16	160/16	
Cleaning impact	kg/Force	11.4	11.4	5.7	5.7	
Water flow - Q _{IEC}	l/h	2240	2240	1120	1120	
Water flow - Q _{max}	l/h	2400	2400	1200	1200	
Max. inlet temp.	°C	70	70	70	70	
Motor:						
Power absorbed	kW	2 x 6.7	2 x 6.7	6.7	6.7	
		V/~/Hz/A	230/3/50/47	230/3/50/47	230/3/50/21	230/3/50/21
			220/3/60/47	220/3/60/47	220/3/60/21	220/3/60/21
			400/3/50/24	400/3/50/24	400/3/50/12	400/3/50/12
			440/3/60/22	440/3/60/24	440/3/60/11	440/3/60/11
Pump	RPM	1450	1450	1450	1450	
Standard Features:						
Weight	kg	160	160	81	81	
Dimensions L x W x H	mm	370 x 800 x 900	370 x 800 x 900	370 x 700 x 500	370 x 700 x 500	
Cable	m	4	4	4	4	
Standard Accessories:						
Full ceramic pistons		●	●	●	●	
Stainless steel frame		●	●	●	●	