

Mobile Cold Water Pressure Washers



POSEIDON 8-128 ▲




POSEIDON 7-66 ▲
POSEIDON 7-59



POSEIDON 7-66 F ▲
POSEIDON 7-66 FB

Ultimate heavy-duty cold water pressure washers for intense cleaning with high water flow and high water inlet temperature. Ideal for agriculture and food industry. Nilfisk-ALTO POSEIDON 8 - 1 or 2 simultaneous users.

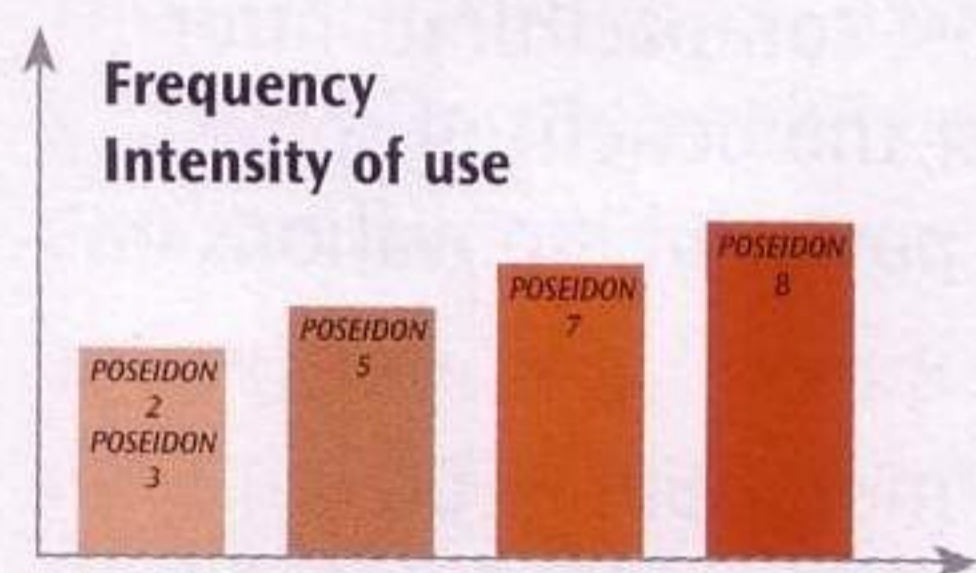

Cleaning power Technical Data:

		POSEIDON 8-128	POSEIDON 7-66	POSEIDON 7-66 F/FB*	POSEIDON 7-59
Pump:					
Pressure	bar/MPa	180/18	190/19	190/19	170/17
Cleaning impact	kg/Force	12.8	6.6	6.6	5.9
Water flow, Q _{max} /Q _{IEC}	l/h	2560/2360	1280/1180	1280/1180	1200/1120
Water flow, Min.	l/h	2360	1180	1180	1120
Max. inlet temp.	°C	60	85	85 / 70*	85
Suction height (dry)	m	1.5	1.5	1.5 / 1.0*	1.5

		POSEIDON 8-128	POSEIDON 7-66	POSEIDON 7-66 F/FB*	POSEIDON 7-59
Motor:					
Power consumption	kW	2 x 8.0	8.0	8.0	7.1
	V/~/Hz/A	230/3/50/2x25 400/3/50/2x14.5	200/3/50/2x28 200/3/60/28 220/3/60/25 230/3/50/24 400/3/50/14 440/3/60/12.5 415/3/50/13 575/3/60/9	200/3/50/2x28 200/3/60/28 220/3/60/25 230/3/50/24 400/3/50/14 440/3/60/12.5 415/3/50/13 575/3/60/9	230/3/50/20 400/3/50/12 415/3/50/11 440/3/60/10.5
Pump	RPM	1450	1450	1450	1450
Sound level	dB(A)	78	75	75	75

Standard Features:

Weight	kg	135	74	74	71
Dimensions L x W x H	mm	1050 x 720 x 765	1020 x 480 x 940	1020 x 480 x 940	1020 x 480 x 940
HP hose	m/Ø	10/12" DN12	10/DN10	10/DN10	10/DN10

Standard Accessories:

Ergo Gun	● Ergo 3000	● Ergo 3000	● Ergo 3000	● Ergo 3000
Ergo 3000 lance	Tornado	Tornado	Tornado	Tornado
Tornado Plus nozzle	● 1300	● 0640	● 0640	● 0640
Full ceramic pistons	●	●	●	●
HP hose reel		○ 301000202	○ 301000540	○ 301000202